

Dome Cameras With Multi-Axis Gimbal Brackets*




Model	Lens	Angle	Type
EV-1223C12	4.3mm	78°	Color
EV-122C-2	2.9mm	120°	Color
EV-122B-4	4.3mm	78°	B/W

Viewing angles are approximate

SECO-LARM offers both Black & White and Color Dome Cameras for use in those applications which require an attractive, inconspicuous look.

SECO-LARM dome cameras offer high resolution with low lux in a compact and durable enclosure.

*For ceiling or wall mounting

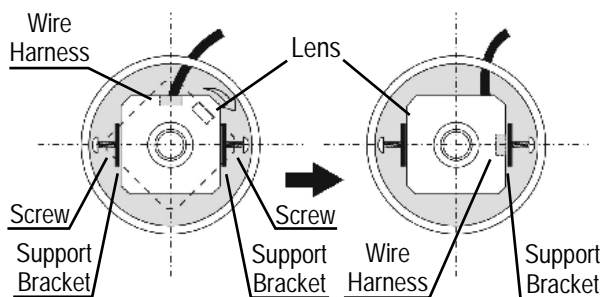

For wall mounting. Remove the 2 screws and turn the lens 90° clockwise until the wire harness is adjacent to the support bracket, then replace the 2 screws to secure it.

Technical Specifications:

Type	Color Cameras	B/W Camera
Chip	1/3" CCD, Sony	1/3" CCD, A1 PROs
Resolution	420 TV lines	
Pickup elements	512 x 492 pixels (NTSC / EIA)	
Scanning system	2:1 interlace	
Sync	Internal	
Video output	1V pp composite output, 75 ohms	
Lens	EV-1223C12 / EV-122B-4 (4.3mm) EV-122C-2 (2.9mm)	
Viewing Angle*	EV-1223C12 / EV-122B-4 (78°) EV-122C-2 (120°)	
Minimum illumination	0.1 lux	
Gamma correction	0.45	
S/N ratio	>48dB (AGC off)	
Shutter control	Auto Electronic Shutter (AES) 1/60~1/100,000 sec. (NTSC / EIA)	
Backlight compensation	Auto & Manual	
Gain control	Auto	
White Balance	AWB	N/A
D/A Bits	10	
Power source	12VDC	
Power consumption	110mA	100mA
Operating temperature	14°~140° F (-10°~60° C)	
Dimensions	3 1/2" x 2 1/4" (88 x 57 mm)	